

RTCU LX9 eco

Advanced Industrial M2M / IoT Gateway

State-of-the-art platform for tomorrows demanding applications

For Professional M2M / IoT Applications

The **RTCU LX9 eco** has been designed for the most demanding M2M and Internet of Things applications that demands the absolutely most advanced product available on the market.

The **RTCU LX9 eco** rests on the **RTCU M2M Platform**, that brings all the necessary tools together to develop, implement and maintain the most sophisticated M2M/IoT applications.

The **development task** is supported by the **free** RTCU IDE development environment complimented by a large and comprehensive documentation and application example library.

The RTCU Communication Hub is the corner-stone of the **communication infrastructure** ensuring reliable two-way device communication in any network environment.

Deploying and maintaining new application and firmware versions for devices in the field are handled by the powerful RTCU Deployment Server.


More than two decades of know-how in one product!

Experience and Know-how

For twenty years Logic IO has been committed to offer the most sophisticated platform for advanced and highly demanding M2M / IoT applications.

The **RTCU LX9 eco** is the result of this accumulated experience combined with valuable feedback from hundreds of professional and mission critical applications by major organizations around the world.

RTCU products are deployed **underground, stationary, on the road, at sea, on the rail and in the skies!** - In any imaginable application and environment.

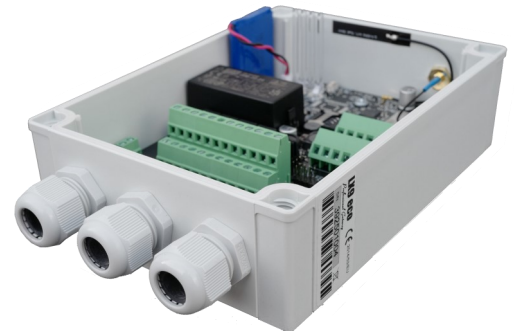

Device Advantages

- RTCU NX-910 compatible.
- High-Performance LX IoT Core.
- Large memory capacity.
- LTE Cat. 1 Cellular Engine.
- Bluetooth LE 5.3.
- 1-Wire bus.
- Multiple RS232/RS485 channels.
- Modbus expandable I/O.
- Digital and analog input/outputs.
- AC/DC relay outputs.
- Digital audio subsystem.
- Integrated battery backup.
- IP66 Ingress Protection.

Platform Advantages

- NX32L execution architecture.
- Free development tools.
- Secure platform.
- Hardware accelerated security.
- Huge standard API.
- Open platform SDK.
- Comprehensive protocol support.
- Instrumented Execution.
- Hardware virtualization.
- Sophisticated deployment tools.
- Fast and free email support.

World Leader in Advanced and Professional M2M / IoT Technology since 1999.

RTCU LX9 eco Highlights

Advanced Industrial M2M / IoT Gateway

Platform:

- Based on the **RTCU M2M Platform**.
- **NX32L (NX32 for Linux) execution architecture**.
 - RTCU IDE development tool.
 - Operates under a full and highly optimized Linux variant.
 - Secure communication with TLS and hardware assisted encryption/authentication.
 - Open and extendable with Platform SDK.

Wireless Communication:

- **LTE Cat. 1 Multi-Band Cellular Engine (EMEA)**.
- **Bluetooth Low-Energy - BLE 5.3**.

Wired Communication:

- **1-Wire bus** for accessories such as ID-button reader, temperature sensors, etc.
- **2 x RS232** channels and **2 x RS485** channels.

I/O Interfaces:

- **2 x analog inputs** with 0..10 volt / 0..20 mA.
- **5 x digital inputs** and **4 x high-power AC/DC relays**.
- 4 digital inputs can be configured as **IEC62053-31 Class A** compliant.
- **Expandable I/O** with standard Modbus modules.

User Interaction:

- **Digitized audio** subsystem.
- **DTMF** support for Interactive Voice Response applications.
- High-speed **Mini-USB service-port** connector.

Storage:

- Standard Micro **SD-CARD** reader.
- Internal **flash drive** with up-to 64 MByte capacity.
- **Persistent memory** and circular **datalogger**.

Encapsulation:

- Housed in an IP66 ruggedized plastic encapsulation for outdoor usage.




Services Available

Technical Support.
Application development support.
Maintenance.
Hardware support.
Warranty services.

Accessories

Modbus I/O extension modules.
Antennas.
Cable parts.
1-Wire parts.
...and more.



Find out more and start developing today!

Learn more about the RTCU M2M platform and the NX32L architecture in the "**The RTCU M2M Platform**" data sheet.

To learn more about the technical details and usage of the RTCU LX9 eco, please download the "**RTCU LX9 eco Technical Manual**".

Also make sure to get the **FREE RTCU IDE** Development Environment, **RTCU Communication Hub** and the **Deployment Server** to get a hands-on experience how rapid development/deployment of game changing M2M/IoT applications were meant to be.

Please visit www.logicio.com

RTCU LX9 eco Specifications

RTCU M2M Platform

- NX32 for Linux - NX32L.
- Fully NX32 compatible.
- Larger capacity and higher performance compared to NX32.
- Open and user-extendable API.
- RTCU M2M Platform SDK.

LX Hardware Core

- Powerful 32-bit ARM processor.
- Hardware floating point and DSP.
- 128 Mbyte RAM.
- Up-to 512 Mbyte NAND flash.
- Real-time clock with battery-backup.

Security

- Embedded firewall.
- TLS/SSL support with full certificate management.
- TLS/SSL support for SMTP, MQTT, FTP, HTTP, RTCU Communication Hub and TCP/IP sockets.
- Hardware assisted strong encryption/authentication: AES-128, AES-192, AES-256, DES, TripleDES, HASH, RND and RSA signature.

Storage

- Persistent data flash.
- Non-volatile SRAM.
- Internal flash drive (Up-to 64 MByte).
- Circular datalogger.
- Micro SD-card.

Bluetooth

- Bluetooth Low Energy 5.3.
- IEEE 802.15.4-2011 PHY
- Optional: Zigbee and OpenThread.

Cellular Engine

- LTE Cat.1 Engine (EMEA).
Max 10 Mbps(DL)/Max 5 Mbps(UL).
LTE FDD: B1/B3/B5/B7/B8/B20
LTE-TDD: none.
WCDMA: B1/B5/B8
GSM: B3/B8.
- DTMF decoding / transmission.
- Digitized voice playback / IVR.
- Internal SIM card-reader, with Mini-SIM 1.8/3 volt.
- Optional eSIM.

Audio

- Fully digitized audio system.
- Transfer, store and play audio.
- Digitized cellular audio.

Wired Communication


- 2 x RS232. One with control signals.
- 2 x RS485.
- 1-Wire bus.
- USB service/programming port.

User Interaction

- 4 x bi-colour LED.
- DIP-switches.
- I/O configuration jumpers for analog and digital operating modes.
- Jumpers for RS485 termination
- Reset / recovery switch.

Sensors

- Temperature sensor.

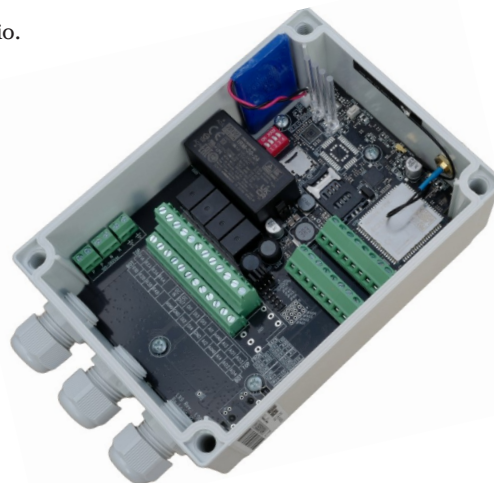

Logic IO Worldwide Headquarters

Holmboes Allé 14
8700 Horsens
Denmark

Phone: +45 7625 0210

Fax: +45 7625 0211

Commercial enquiries: sales@logicio.com

Technical support: support@logicio.com

www.logicio.com

RTCU LX9 eco Specifications (continued)

Digital I/O Interface

- 4 x relay output.
Max. 5A @ 250VAC / 30 VDC
- 5 x digital inputs.
Logic high: 8 to 40 VDC.
Logic low: -5 to 3 VDC.
Impedance: 13.8kohm @ 12V.
- 4 x IEC62053-31 Class A input.
- I/O expansion Modbus modules.

Analog I/O Interface

- 2 x analog inputs.
Range is 0..10VDC or 0..20 mA
Resolution: 12 bit
Accuracy: Typ. $\pm 0.08\%$ FSR[V] @ 25°C
Impedance: 40 kohm [V]/500 ohm [C].
- Protected against transients and low-pass filtered.
- I/O expansion Modbus modules.

Electrical

- Supply operating range:
8 to 36 VDC.
100 to 260 VAC.
- Short and reverse power protected.
- 12/24V DC-out @ 500/250 mA.

Battery and Charger

- On-board 1 Ah [nominal] Li-Ion battery.
- Intelligent charger with temperature throttle and sub-zero degrees support.
- On-board temperature sensor.

Power Management

- Low-power modes.
- Wait for Event: Timer, Digital input, RS232/RS485, Cellular, Power change.
- Power consumption:
down to 0.2 mA@12V.
- Supervision of supply voltage / type.

Internal Interfaces

- Plug-compatible with the NX-910.
- Micro SD-Card slot with presence detection.
- Mini SIM-card slot.
- Service-port (Mini USB-B).
- Screw-terminals for:
Power, I/O and DCOUT.
- Angled screw-terminals for:
RS232, RS485, 1-Wire and DC-out.
- Jumpers for RS485, I/O and DC-out operating modes.
- Internal BLE Antenna.

External Interfaces

- 3 x M20 cable glands.
- SMA female connector for cellular.

Physical Characteristics

- Encapsulation:
Durable Polycarbonate plastic.
- TPE gasket.
- Colour: RAL 7035—light grey.
- Approx. 700 gram without accessories.
- W 130 x H 180 x D 60 mm.
(without external connectors)

Environmental Specification

- Operating temperature: -40 to 60°C.
- Battery charge temperature:
-10 to 45 °C
- Recommended storage temperature:
0 to 45°C.
- Humidity: 5..90% (non condensing).
- Impact resistance: IK08 (EN62262)
- UV resistance: UL 508.
- Flammability Rating: UL746C 5"
- Ingress Protection: IP66 (EN60529).

Approvals

- 2014/53/EU Radio Equipment Directive.
- 2014/30/EU EMC Directive
- 2011/65/EU RoHS Directive.
- Cellular:
GCF/CE/FCC/PTCRB/IC/Anatel/SRRC/NAL/
CCC/KC/NCC/JATE/TELEC/RCM/IFETEL/
FAC/NBTC/ICASA.

Warranty

- Two-years return to factory parts and labor.
- Optional warranty up to 5 years.
[restrictions apply].



Logic IO Worldwide Headquarters

Holmboes Allé 14
8700 Horsens
Denmark
Phone: +45 7625 0210
Fax: +45 7625 0211
Commercial enquiries: sales@logicio.com
Technical support: support@logicio.com
www.logicio.com

Models Available

SKU: RT-LX9E