

RTCU-MAX-DIN

Remote Telemetry and Control Unit

The RTCU-MAX is the most advanced unit in the RTCU product line with an impressive list of features and possibilities. The product is a unique combination of a powerful Programmable Logic Controller (PLC) and a GSM phone tightly connected in a single easy programmable unit. The RTCU-MAX product provides the user friendly answer to your remote monitoring, remote control, surveillance and datalogging needs.




The RTCU-MAX product allows rapid development of custom specified applications combining control / monitoring / datalogging with advanced communication techniques such as voice / DTMF interaction (voice response systems), alarm/messages send to / from the unit as SMS messages or via data-transfer directly to / from a Windows application. The product includes a user-friendly Integrated Development Environment (RTCU IDE) running under Windows where the complete application is developed and finally transferred to the unit via a standard serial port, or alternatively using the GSM data transfer capability.

The unit is programmed in a PLC language called VPL based on the ST language from the international standard IEC1131-3. This language is very easy to learn and can be compared to BASIC / PASCAL but with a number of facilities to allow easy development of PLC-like applications. Voice-messages are also created within the environment by the use of a simple microphone and a soundcard in the PC. The RTCU IDE environment also includes a very sophisticated simulator so that the application can be executed and debugged under Windows - before being transferred to the physical unit !. From the VPL language all the resources on the platform is easily accesible, such as: send / receive SMS-messages, receive / initiate GSM calls, voice, DTMF interaction, Realtime clock, datalogging as well as low level functions such as Timers, up / down counters, edge triggers etc. As an option a support package for data-transfer is available that allows easy data-transfer to / from the unit from within a standard Windows application.

Stay ahead and choose the Logic IO RTCU-MAX product when dealing with advanced and flexible GSM based control/monitoring/datalogging applications!

Some of the application areas includes:

- Surveillance of industrial equipment
- Remote site control and data acquisition
- Dataloggers
- Process monitoring and reporting
- Alarm / Security systems
- Mobile applications using optional GPS module

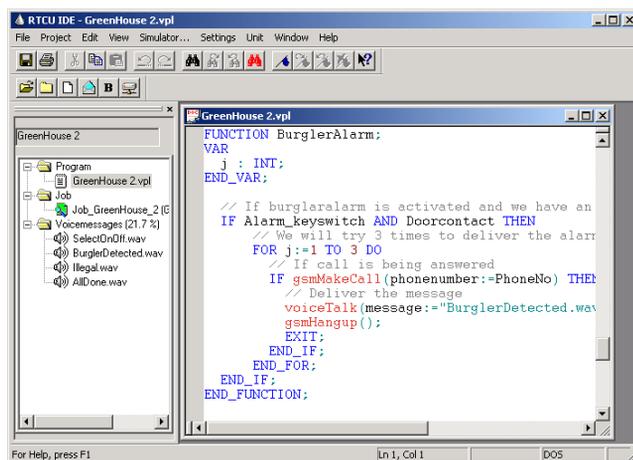

The RTCU-IDE Integrated Development Environment for the RTCU, is an easy-to-use program for all aspects in the development of applications for the RTCU. The RTCU-IDE contains a broad range of features, such as project control, comprehensive online help, built-in syntax highlighting editor, code generating wizard, voice recorder etc. A built-in simulator, enables complete simulation of all features on the actual RTCU: GSM phone, SMS messaging, LCD Display, Analog / Digital I/O etc. A remote update feature allows the application developer to download new versions of a program or voice messages to a remote RTCU, via a simple telephone modem connected to the PC. Together, all of these features enables the user to cut development time to a minimum.

RTCU-MAX-DIN

Remote Telemetry and Control Unit

Key features:

- 16 Digital inputs
- 16 Digital outputs, max 1 Amp/channel
- GSM Phone for voice, data, SMS, fax, email etc.
- Real Time Clock with battery backup
- 3 User defined dipswitches
- 2 User defined Bi-color LED indicators
- Monitors supply voltage
- RS232 Serial port (110 bps to 115 Kbps)
- Standard SIM card reader
- 64 Kbyte storage for VPL programs
- 4 Kbyte storage for user variables
- 64 Kbyte storage for strings
- Upto 110 seconds storage for voicemessages
- Maximum of 128 separate voicemessages
- 512 Kbyte for datalogging
- 16 simultaneous VPL jobs operating in one of two priorities
- Optional RS485 multidrop network
- Optional temperature sensor onboard

Digital inputs		Min	Typ	Max		All inputs are protected against transients and lowpass filtered
	Logic "High"	8	10	40	VDC	
	Logic "Low"	-5	-	5	VDC	
Digital outputs		Min	Typ	Max		All outputs are protected against short-circuit. Build-in alarm for short-circuit and excessive temperature.
		5	-	34	VDC	
		-	-	1000	mA	
Power supply		Min	Typ	Max		Protected against wrong polarity, self healing fuse
		8	-	36	VDC	
Power consumption		40	55	150	mA	At 24 VDC supply voltage
External dimensions	W 157 x D 58 x H 86 mm (M36)				For mounting on standard DIN rail (EN50022). A flying-lead 3mm thick coaxial cable with a FME Male connector is included for connection to external GSM antenna (antenna not included).	
Storage temperature	-40		+90	°C		
Operating temperature	-20		+45	°C		
Approvals	EN-50081-1 Emission EN-61000-6-2 Immunity				Unit is CE approved	

Technical data subject to change

For more information:

Web: www.rtcu.dk
Email: info@rtcu.dk

Distributor: